webviews ET-800 HD Intelligent Internet player user manual

One .Product packing accessories and their connection introduction

Thanks very much for choosing ET-800 HD Intelligent Internet player.It will become your ideal family entertaining and pastime companion.

ET-800 packing accessories list is as follows:

- ET-800 HD Intelligent Internet player machine/1 piece
- Infrared(IR) remote control/1 piece
- 1.5 meter RJ-45 Ethernet cable/ one strip
- 12V 2A power adapter and one pair of batteries/1 set
- HDMI video cable /1 strip
- built-in WIFI module
- Infrared(IR) remote control standard battery /one pair

ET-800 cables connection schematic diagram

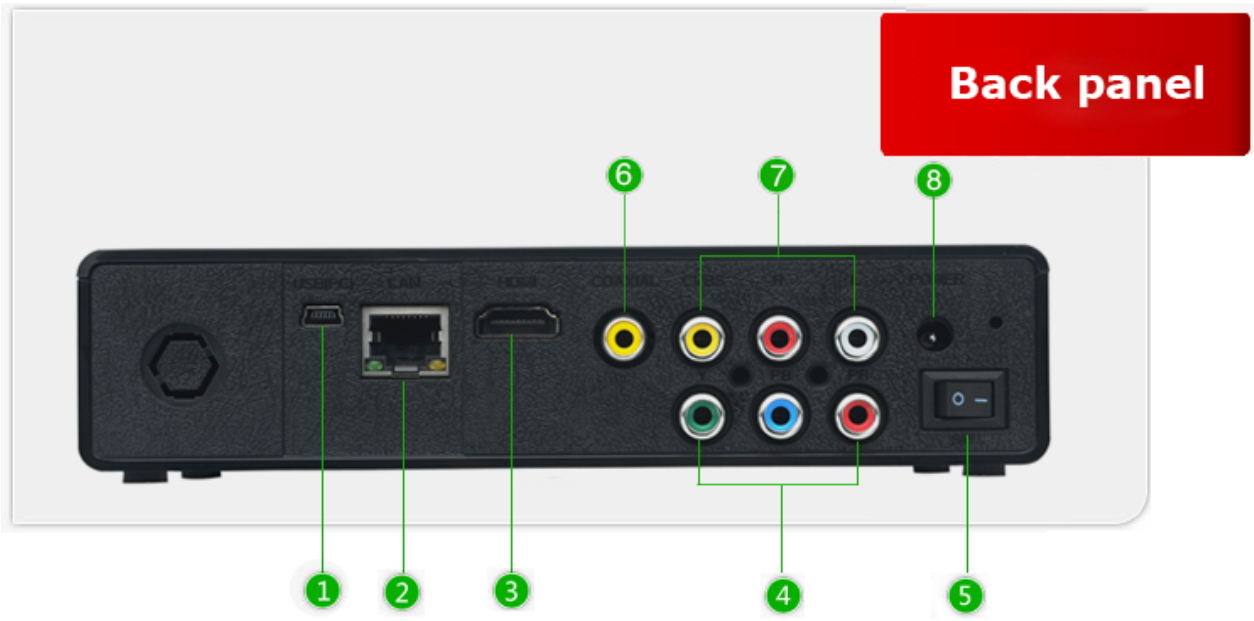

1 Mini USB
2 Wired network port
3 HDMI digital port
4 YUV chromatic aberration port
5 Hardware switch
6 S/PDIF highly-efficient audio output port
7 Composite AV with two ports
8 Power adapter

Attention:when using ET-800,please use the packed power adapter to guarantee safe and normal usage.

Connect HDMI cable,RJ-45 Ethernet cable and power adapter to ET-800,press power switch,then ET-800 will work normally.

The default video out put of ET-800 is HDMI output.set the corresponding HDMI input port for TV signal source,then you can see ET-800 out put page .if what you connect is AV or component cables instead of HDMI cable,please press

on the remote control within 30 seconds after switching on to directly switch ET-800's output signal,then you can see ET-800 dispalying screen .

Two. Introduction about remonte control buttons

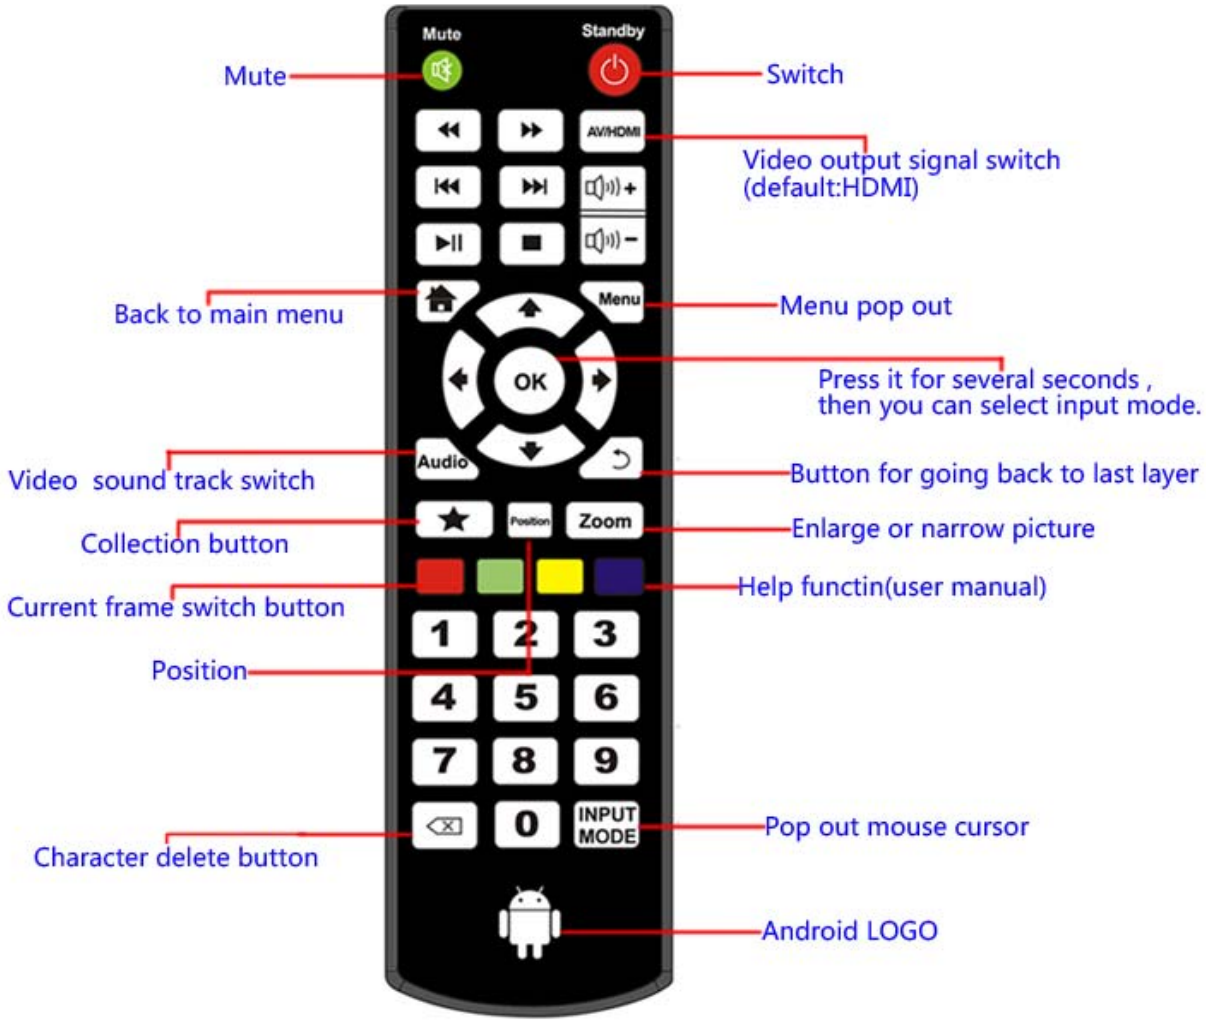

Note:common buttons will not be explained in detail here.

Three .Configure your ET-800 quickly

Several seconds later after system gets through electricity, you can enter into the main menu page which is shown below.

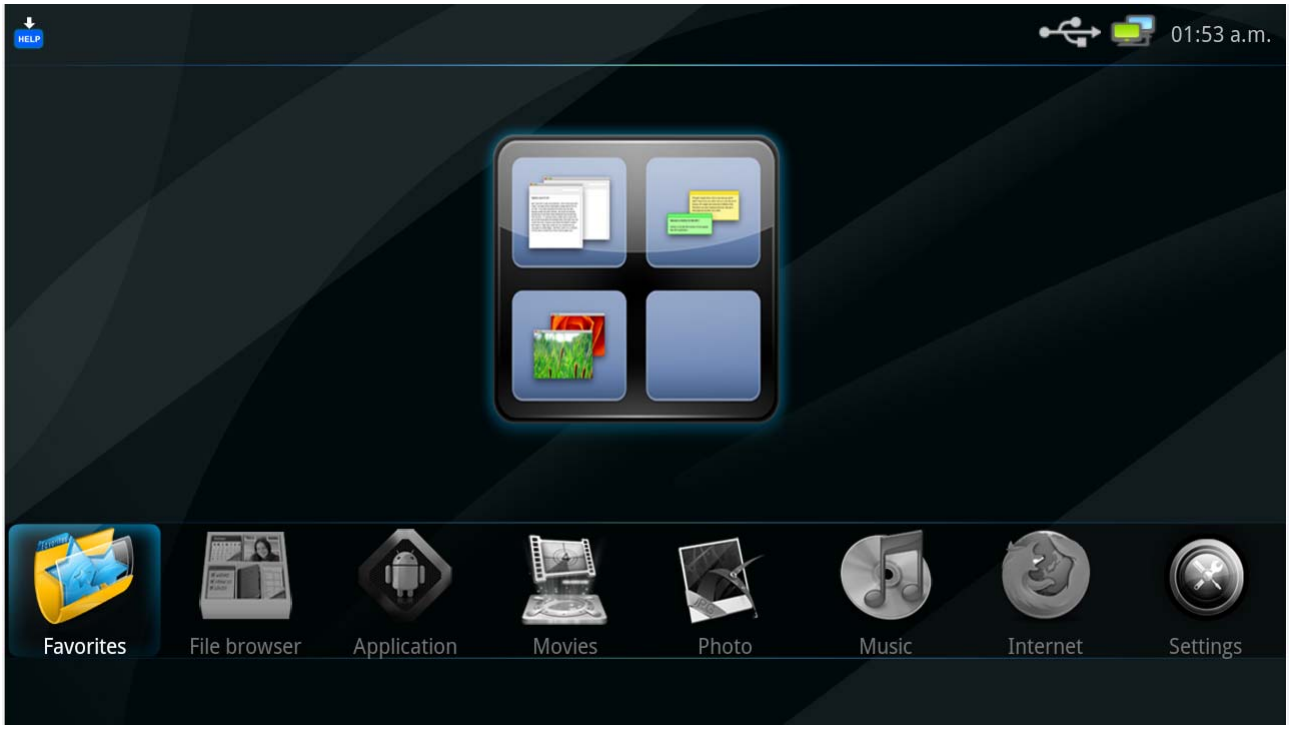

When you use it for the first time,please set its language,Internet specifications,time zone and etc..the concrete operation is as follows:

1.choose in the main menu and enter its setting page.

2.choose in the system,and enter the setting page and choose language in the language option column.

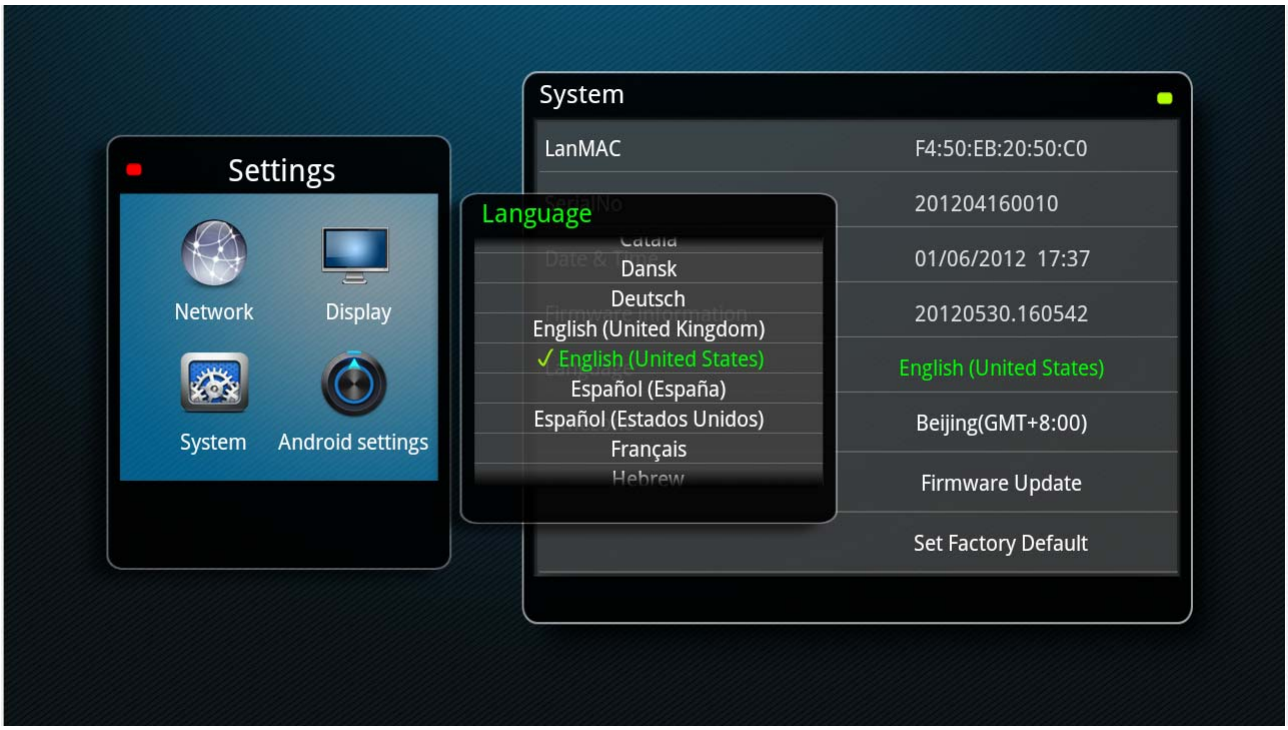

3.Then,connect the network:press on the remote control to get back the last layer menu and then choose network.

If you use RJ-45 Ethernet cable to conncet network,please choose LAN option :open LAN (for DHCP network which has been enabled,system will automatically obtain IP and display the present IP value .For DHCP which has not been enabled,you need to input IP value and DNS value in the LAN setting.

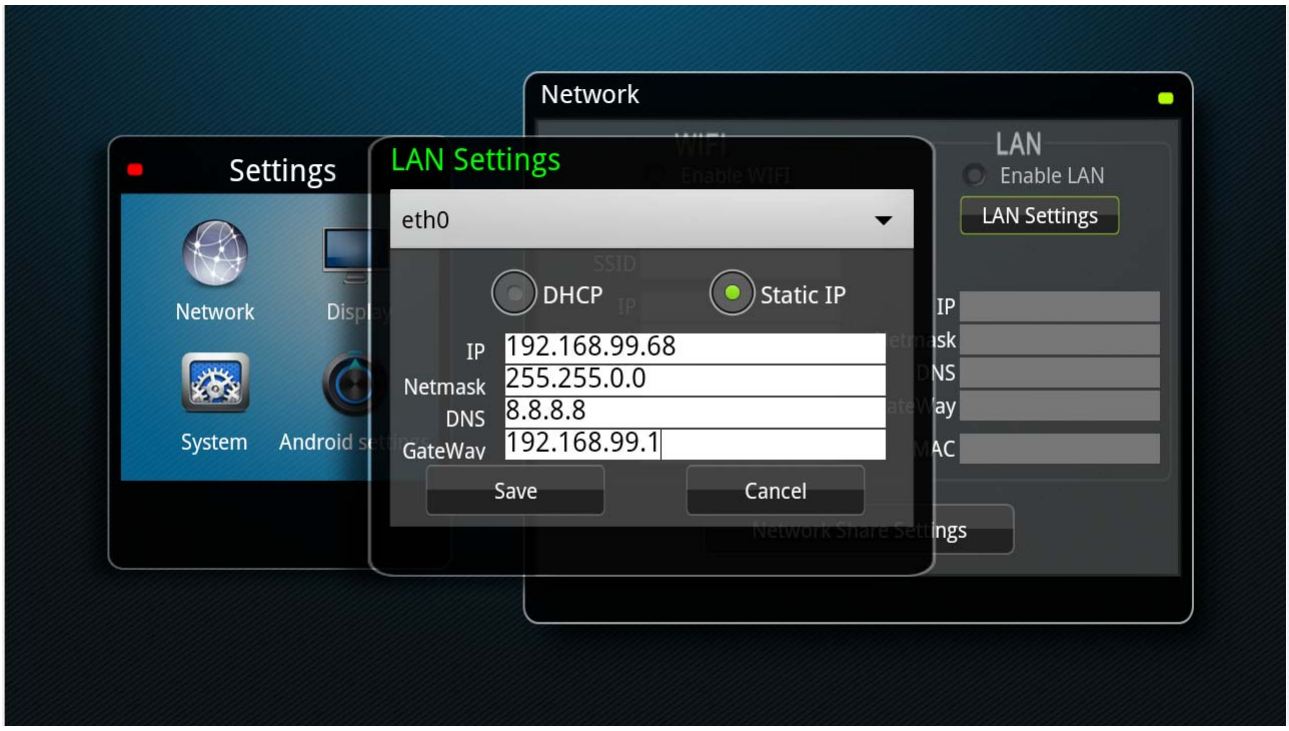

If you want to use WIFI to connect the network,please choose WIFI option .Search network in the WIFI setting,then ET-800 will display the searched wireless networks IDs.

In the above form list,you can choose the network ID which you want to connect .For the wireless network ID which has network key,you need to input user acount and

password.

4.Once ET-800 connects with network,it can correctly obtain Internet time,but you need to choose the corresponding time zone,for example,when you use it in China,you need certainly to choose Beijing time.You can enter to choose the concerning time zone.

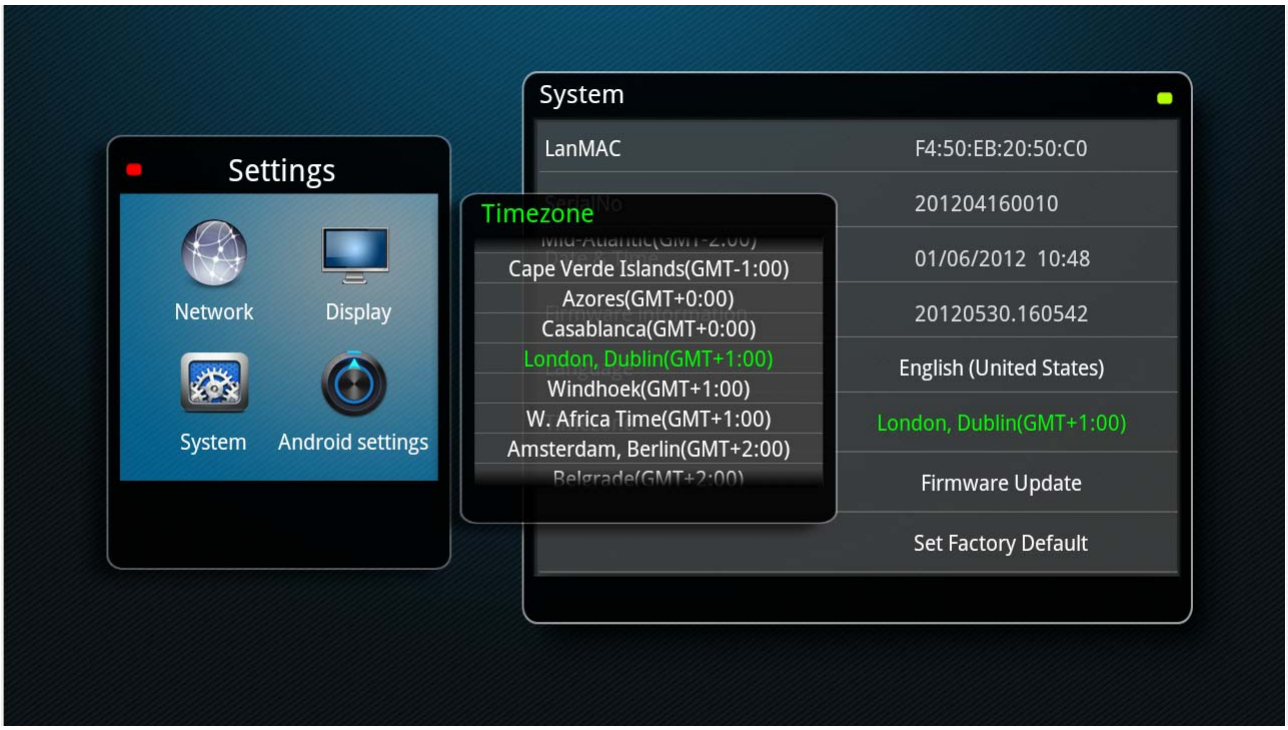

5.Until now,basic settings are finished .You can press or on the remote control to get back to main menu.

Four. To better use your ET-800 remote control.

ET-800 applies android 2.3.5 operation platform .There are several special funtion buttons which will let you to operate your ET-800 better .

1.

application programme menu pop-out button,that is,when you are running different appliation programmes,different menu will pop out after pressing this button,for example, when you choose to play some video files in the main menu ,

will help to pop out video information and etc.You can choose subtitle,audio track and etc. on the pop out menu which is shown below:

In the option ,if you press

button,you can add,edit,delete the corresponding applications type and other management operations.Please refer to the following picture:

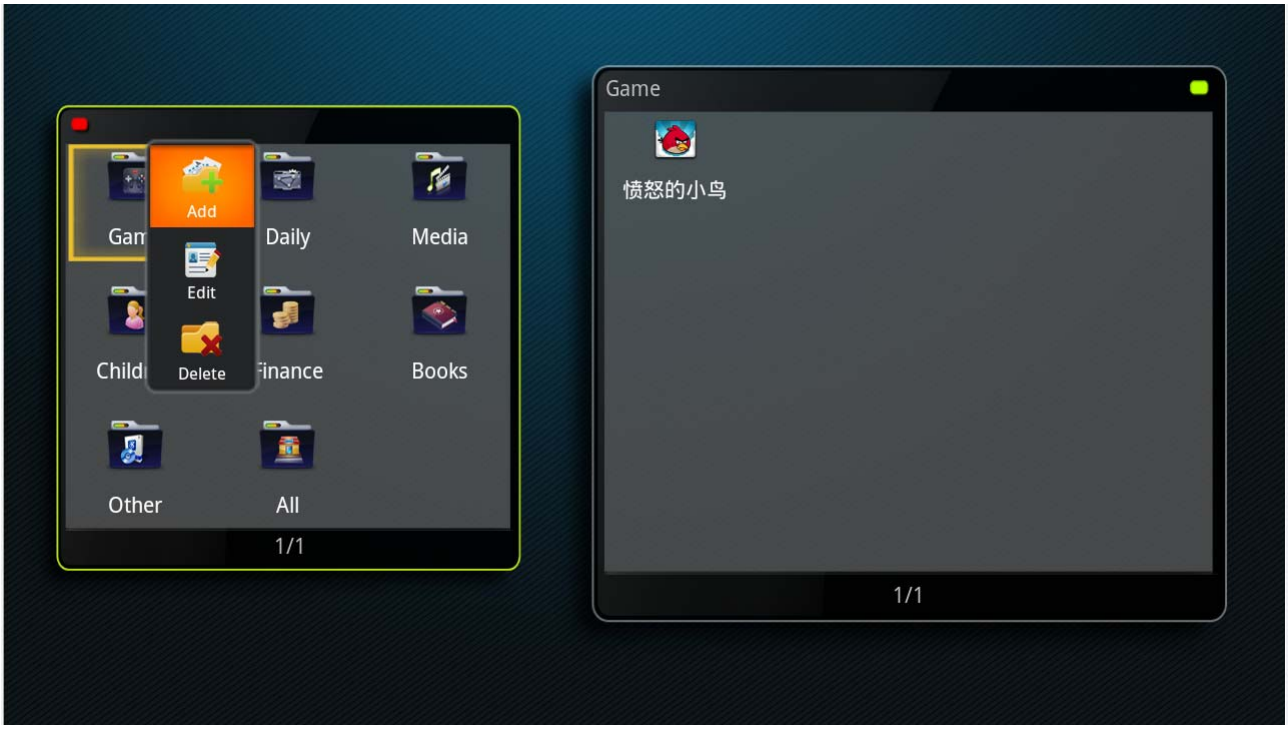

As shown in the above picture,you can edit application programme type through

As shown in above picture,you can move or uninstall application programme through .

2. and button.

As for withdrawing from the present displaying page, is for withdrawing one by one,while is for going back to the toppest layer at one time .

3. Buttons for switching between present dialogue columns, please see the following schematic diagram:

4.Press INPUT MODE,Many of softwares downloaded from Android electric market may not certainly support direction buttons of remote control to move the chosen column.The best and most convenience way is to use the wireless mouse, but if you don't have wireless mouse,it doesn't matter, please press this button INPUT MODE, then the mouse cursor will be shown on the screen, you can move the mouse cursor to the place you want to click by the direction button of remote control, then press OK to select.

For example, if you want to watch video via network video client end software, you can use INPUT MODE to operate.

5. OK button,This is the most common button, as for its common applicatin,we don't explain to much here.To press is for confirmation, but before soft keyboard comes out, it has another function.When soft keyboard pops out,press OK for over 2 seconds,character input mode switching menu will pop out .

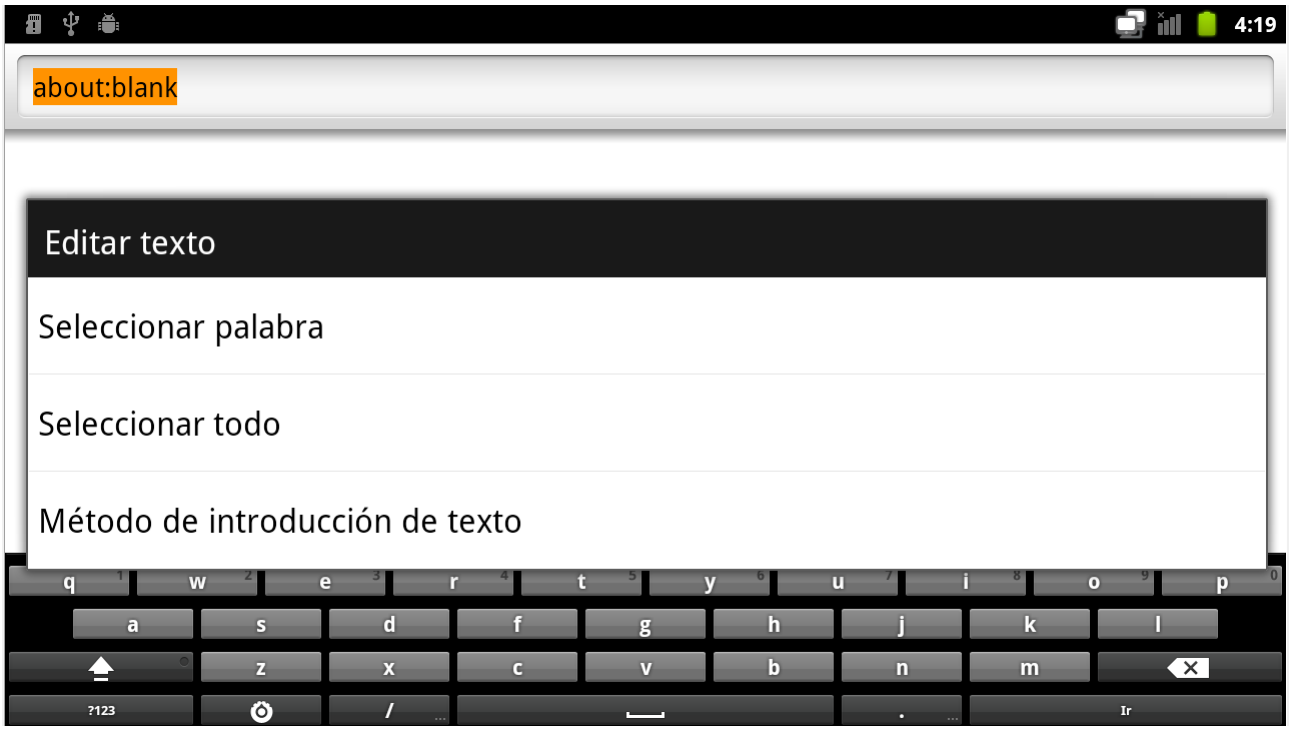

As shown in above picture, when you want to type in a website address in the webpage address bar, the soft keyboard will come out.At this time, please press OK and hold it over 2 seconds, then there will pop out a menu for you to choose input mode. This is not a commonly used function,but it is a necessary funciton.

6. button

Select the corresponding application programme, press ,then this software will create a fast connection way in category.

Five. usage of ET-800's special functions

1. The embed hard disk and install method.

Connect the cables:

Buckle the buttom panel to the matrix, very easy!

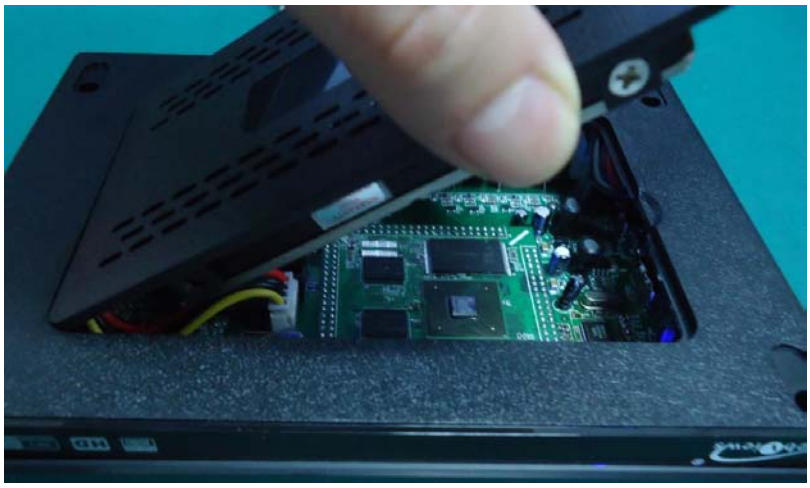

2.USB(PC) port application,There is a

port on the back panel of ET-800.You can connect ET-800 to the computer host via a USB cable with standard mini port . When you connect ET-800 with the hard disk, you can connect ET-800 with the PC via this connector. PC will recognize an equipment of USB hard disk, then you can achieve function of copying file,and you don't need to remove the hard disk .Attention please: when the USB port connects with the PC, it equals that PC controls hard disk's operation of writing and reading. at this moment, ET-800 can not recognize the hard disk.Only cutting of the USB cable can ET-800 control hard disk's operation of reading and writing.

3.Application of Network sharing

It is convenient to use network sharing application of ET-800.You only need to share category in PC, put it into the same local network, then ET-800 can connect to the PC share category through the network sharing, and can visit the files inside.The most common use is certainly to directly play the video files in PC hard disk . It is very easy to operate:

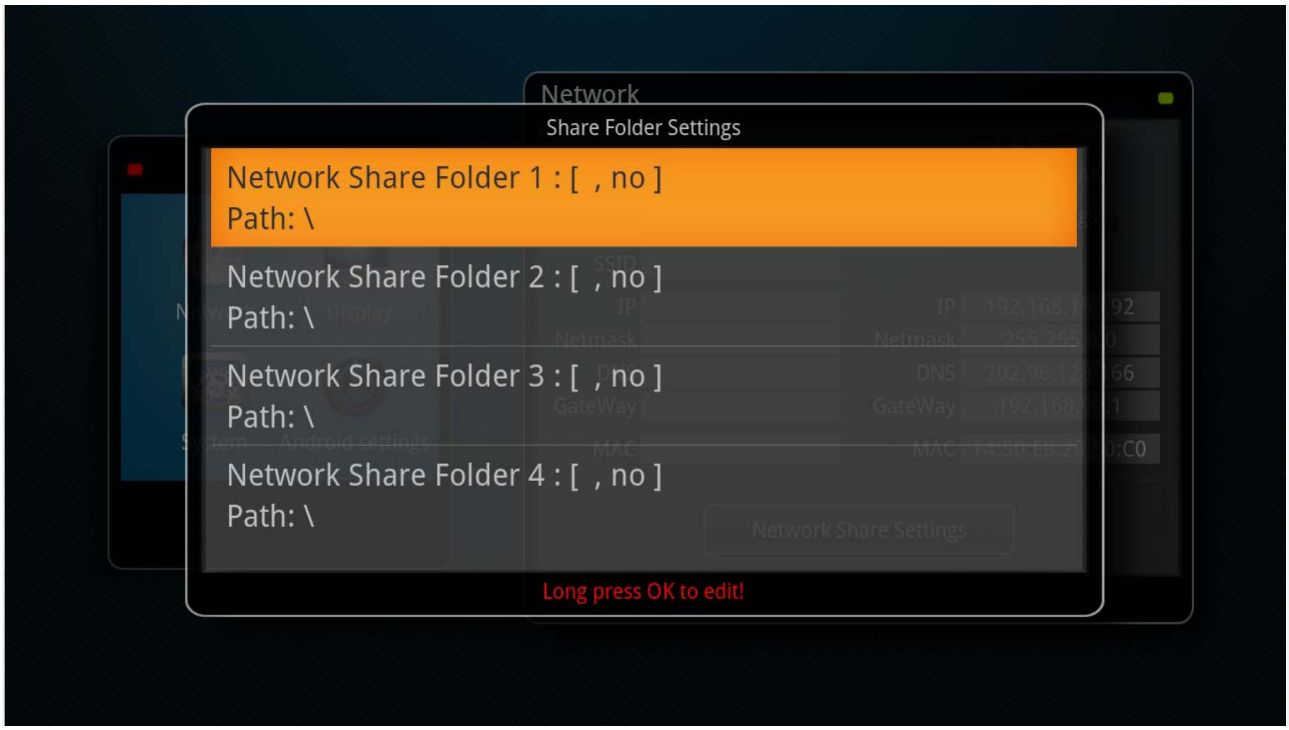
Network
Share Folder Settings
Network Share Folder 1 : [, no]
Path: \
Network Share Folder 2 : [, no]
Path: \
Network Share Folder 3 : [, no]
Path: \
Network Share Folder 4 : [, no]
Path: \
Long press OK to edit!

Enter into option in the main menu, select 

,then you will see the network sharing setting below.Select one option which hasn't yet been set, such as 

, then you can access to the setting menu of the network sharing 2.

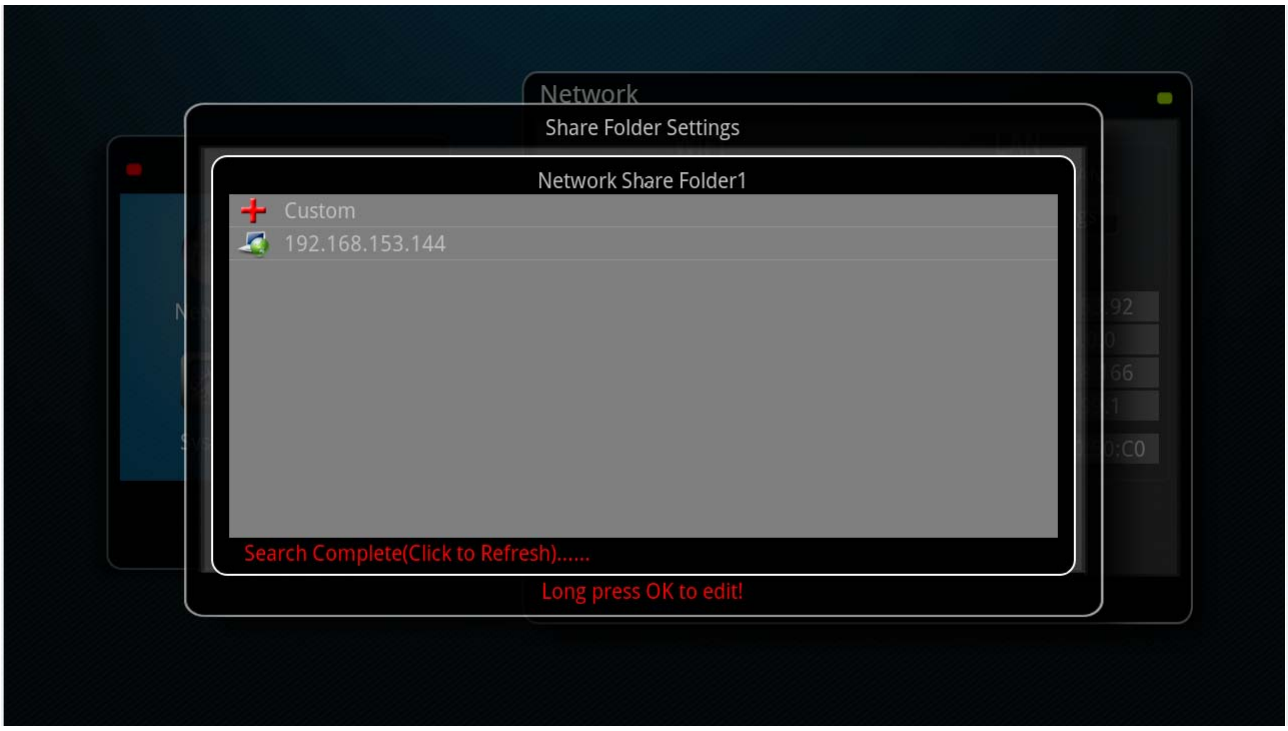

Find 1 sharing PCs in the local network! Select one which you want to connect to. Select the category which you want to open.

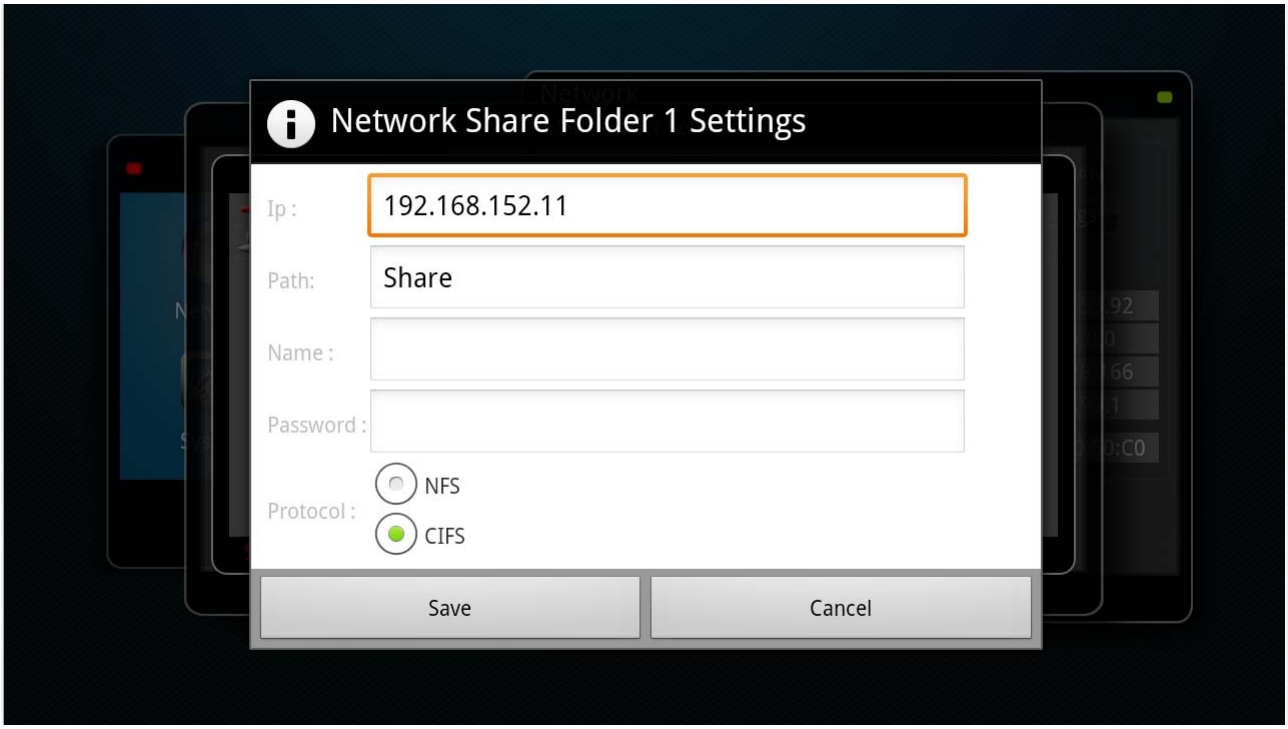

Of course,you need to save and record this path, then press to get back to

main menu.

In

,you will find there appear one more share equipment –share 2!This is from networking sharing!